

---

# BuzziZone

## Product Specification Sheet

---

This document contains technical information about the BuzziZone

---



[www.buzzi.space](http://www.buzzi.space)










## Free standing sound absorbing screen in BuzziFelt

The BuzziZone is a half-height sound absorbing partition wall that provides a little privacy and peace in your living room or office. It is light, colorful, tackable and sound absorbing. In other words, it is ideal for concealing a kids' corner, work area or quiet reading nook. What is more, the BuzziZone suits both modern and traditional interiors.

Design by Sas Adriaenssens

---

## General

-  BuzziZone
  - Panels: Core: Honeycomb
  - Cover: Felt
-  Connection Part: Velcro
  - Fabric, Terra, Hero
-  W 108 cm   L 208 cm   H 125 cm  
W 42.52"   L 81.89"   H 49.21"
-  17,6 kg | 38.80 lbs
-  Dry use
-  Flat packed
-  Multicolor (different colors for panels A, B, C and connection parts)

---

## Acoustics



Attenuation

---

## Content

Configurations	3
Components	3
Fabrics	4
Dimensions	5
Acoustics	6

# Configurations

## 📍 BuzziZone

Panels: Core: Honeycomb

Cover: Felt



Connection Part: Velcro  
Fabric, Terra, Hero

Panel A: L 208 cm    H 125 cm  
          L 81.89"    H 49.21"

Panel B: L 108 cm    H 125 cm  
          L 42.52"    H 49.21"



Panel C: L 38 cm    H 69 cm  
          L 14.96"    H 27.17"

Total:    W 108 cm    L 208 cm    H 125 cm  
          W 42.52"    L 81.89"    H 49.21"

Packaging: W 8,5 cm    L 213,5 cm    H 130 cm  
              W 3.35"    L 84.06"    H 51.18"

Panel A: 10,8 kg | 23.81 lbs

Panel B: 5,7 kg | 12.57 lbs



Panel C: 1,1 kg | 2.43 lbs


Total: 17,6 kg | 38.80 lbs

Packaging: 22,6 kg | 49.82 lbs

Multicolor



(different colors for panels A, B, C and connection parts)

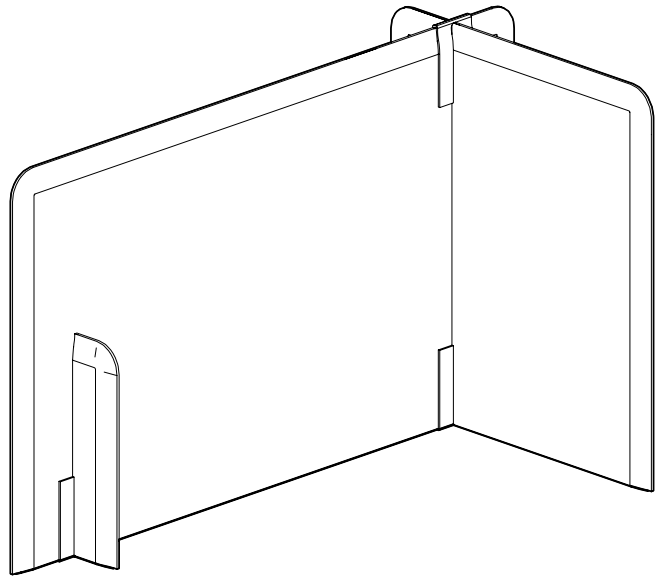

# Components


## Connections parts



Connection parts available in Fabric, Terra or Hero  
Backside in velcro

# Fabrics


## Felt



**Composition** 100% Recycled PE.T. Felt, latex backing  
**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>  
**Abrasion resistance** >7.000 Martindale  
**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0  
USA: ASTM E84 Class A certified  
**Fastness to light** USA 5



## Fabric



**Category A**  
**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics  
**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>  
**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek  
**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).  
EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
USA: CAL TB 117 | ASTM E84 CLASS A  
**Fastness to light** EU: 4 | USA 4  
**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5  
**Fastness to crocking** USA: Wet 5 | Dry 5




## Terra



**Category B**  
**Composition** 100% Pure New Wool  
**Weight** 370 g/m<sup>2</sup> | 10.91 oz/yd<sup>2</sup>  
**Abrasion resistance** 40.000 Martindale, 25,000 Wyzenbeek  
**Flammability** EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B  
EN: 1021.2/2006 | USA: CAL TB 117  
**Fastness to light** EU 5 | USA 5  
**Fastness to rubbing** EU: Wet 4 | Dry 4  
**Fastness to crocking** USA: Wet 4 | Dry 4



## Hero




**Category C**  
**Composition** 96% new wool, 4% nylon  
**Weight** 580 g/lin.m  
**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013  
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260  
IMO A.652 (16)  
**Fastness to light** Note 5-6, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4-5  
**Pilling** Note 3-4, EN ISO 12945




kvadrat

# Dimensions


**Panel A**

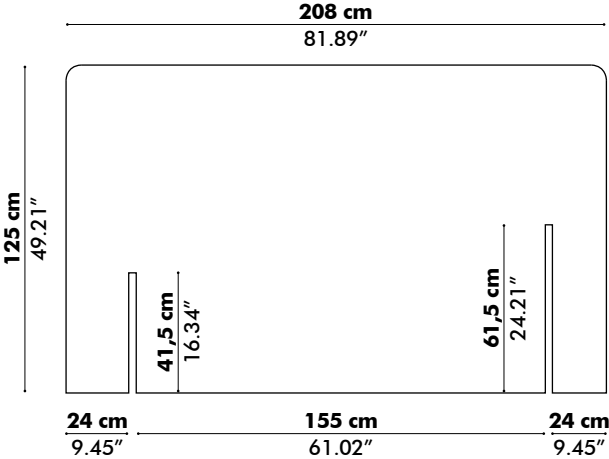



**Panel B**

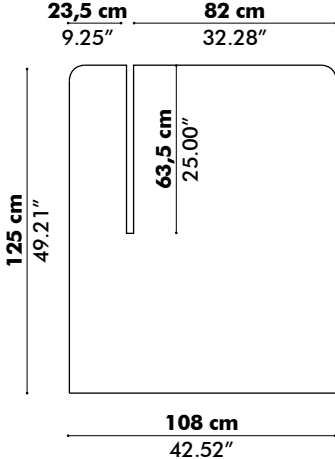

**Panel C**




**Thickness**

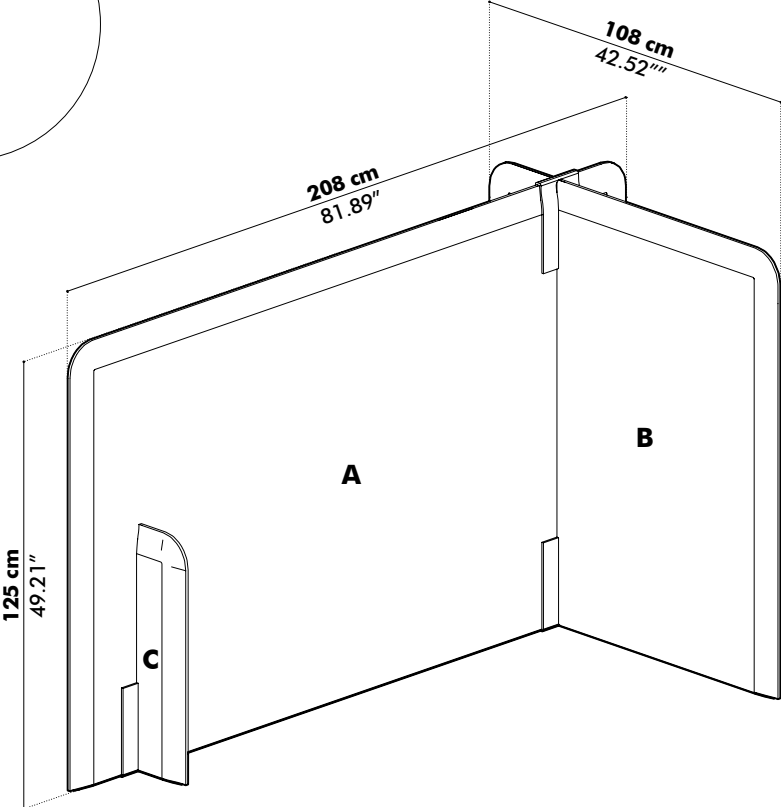

# Acoustics

## Equivalent sound absorption area in m<sup>2</sup> per object

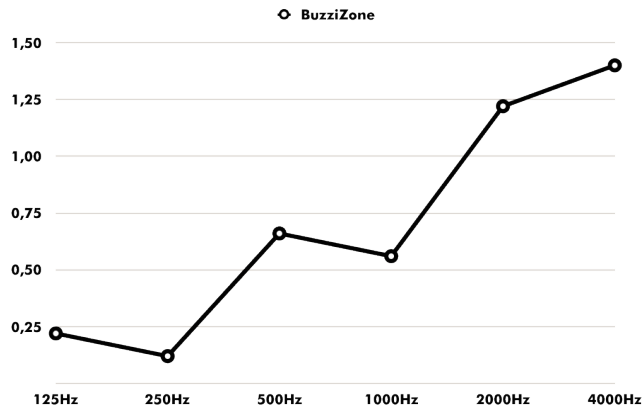

Hz	Aeq/m <sup>2</sup>
125	0.22
250	0.12
500	0.66
1000	0.56
2000	1.22
4000	1.40